



## What you need

Lighter  
Secateurs  
Pair of Pliers  
½ cup of boiling water



## Kit Contents

1 x plastic double ended barb  
2 x easy lock hose clamps  
2 x pieces of heat sealing shrink wrap

### STEP ONE

Remove the damaged part of the hose, using a pair of secateurs and ensure each end of the hose is cut square.



### STEP TWO

Prepare half a cup of boiling water.

### STEP THREE

Place the two pieces of heat sealing shrink wrap and one hose clamp over one end of the hose. The other hose clamp can sit over the other end of the hose.



### STEP FOUR

Submerge the hose end in boiling water to soften, then repeat with the other end.



### STEP FIVE

Push one end of the hose on to one side of the double ended barb and repeat for the other side.

*Tip:* If the hose is still quite hard to get over the barb, coat the barb with dish washing liquid or spray a silicone based lubricant inside the hose. The slippery surface will help when pushing the hose on. Holding the middle spacer with the pliers and twisting the hose can also help.




### STEP SIX

Slide each hose clamp into place and squeeze the hose clamp with pliers until it locks automatically (see picture).




### STEP SEVEN

Slide the first piece of heat sealing shrink wrap over the repair.

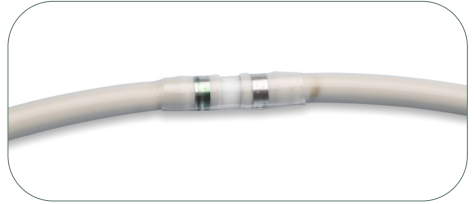

### STEP EIGHT

Use a lighter to apply heat evenly to the shrink wrap. Making sure not to leave the flame in one place for too long.

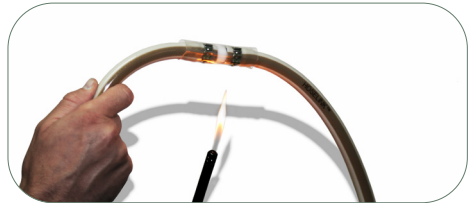

### STEP NINE

Slide the second piece of heat sealing shrink wrap over the repair area and repeat the previous step.

### STEP EIGHT

Apply full pressure to the hose to test for leaks.

